





Top-mounted Sand Filters - JTF SERIES

Jopic offers a wide range of the very latest in pool filter technology ensuring your pool water is clear and clean. Our filters' simple operation and minimum maintenance lead the industry in performance, value and dependability. All Jopic filters are engineered and designed to deliver reliable, all-weather performance with minimal care on today's most demanding installations.

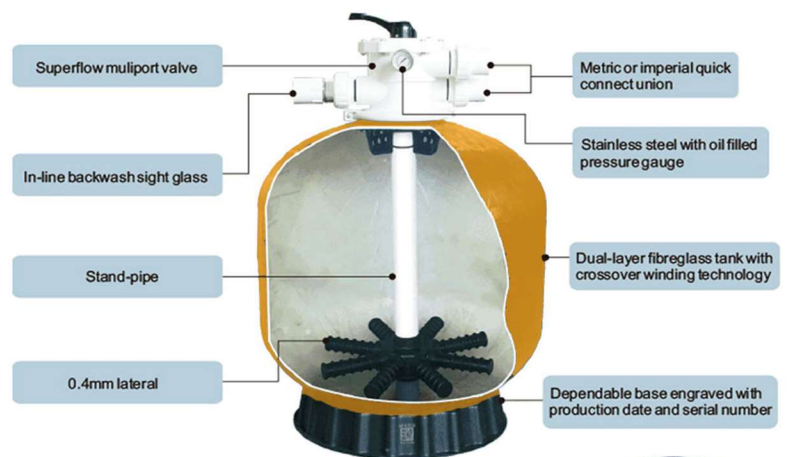


- Maximum working temperature of 50°C (122°F)
- Normal working pressure is rated at 280kPa (41psi), with maximum working pressure of 370kpa (54psi)
- Optional water drain can be added upon requested



Technical Details

MODEL	Tank Dia.		MPV size		Filter Area m2	Bed Depth mm	Silica Sand kg	Max Flow Rate		Designed Velocity m3/hr/m2	Back Wash Flow Rate		Max Working Pressure kpa	Gross Weight kg
	mm	inch	mm (AUS)	mm (EU)				lpm	m3/h		lpm	m3/h		
JTF14	346	1.5	40	50	0.1	175	20	80	5	48	84	5	370	12
JTF16	410	1.5	40	50	0.13	230	30	105	6	48	110	7	370	16
JTF18	454	1.5	40	50	0.16	280	40	133	8	48	140	8	370	16.5
JTF21	534	1.5	40	50	0.23	240	85	192	12	48	202	12	370	21.1
JTF25	635	1.5	40	50	0.33	336	155	270	16	48	284	17	370	24.3
JTF28	700	1.5	40	50	0.38	348	210	320	19	48	336	20	370	33
JTF25B	635	2	50	63	0.33	336	155	305	18	48	320	19	370	24.3
JTF28B	700	2	50	63	0.38	348	210	333	20	48	350	21	370	33
JTF32	820	2	50	63	0.5	384	250	420	25	48	441	26	370	41.5
JTF36	920	2	50	63	0.64	384	350	500	30	48	525	31	370	52.3
JTF40	1016	2	50	63	0.79	432	600	550	33	48	578	35	370	95
JTF44	1092	2	50	63	0.98	432	900	630	38	48	662	40	370	115
JTF48	1210	2	50	63	1.13	504	1150	700	42	48	735	44	370	124
JTF56	1404	2	50	63	1.54	708	1800	950	57	48	998	60	370	182.5

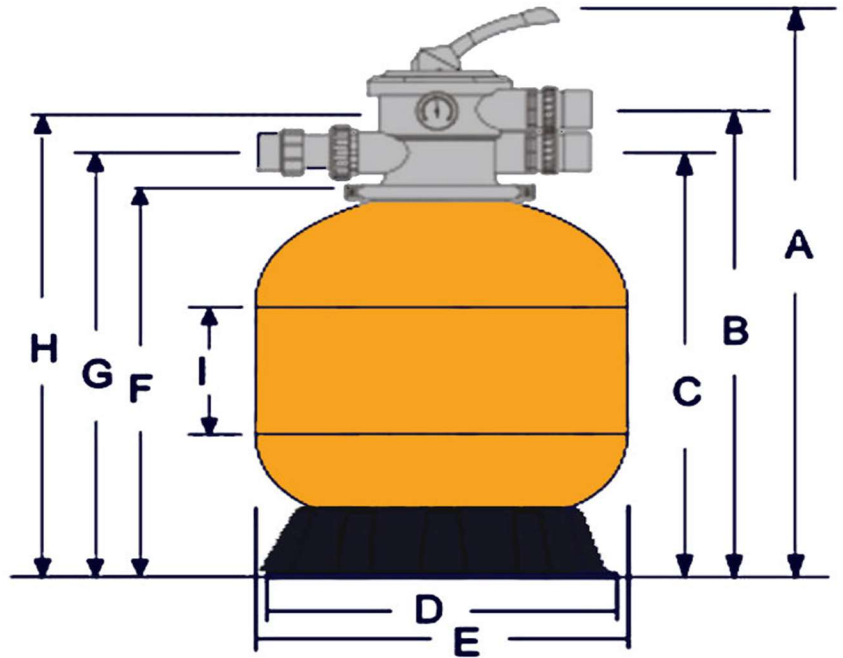

Dimensions

MODEL	A	B	C	D	E	F	G	H	I	Packaging sizes (Excluded MPV)		
										Length	Width	Height
mm												
JTF14	680	550	490	390	346	431	490	550	175	349	349	434
JTF16	770	641	585	390	410	525	585	641	230	413	413	528
JTF18	810	674	614	390	454	558	614	674	250	457	457	561
JTF21	867	731	671	497	534	615	671	731	240	537	537	618
JTF25	967	831	771	497	635	715	771	831	280	638	638	718
JTF28	1027	891	831	497	700	775	831	891	290	703	703	778
JTF25B	1017	863	783	497	635	717	783	863	280	638	638	720
JTF28B	1080	926	846	497	700	780	846	926	290	703	703	783
JTF32	1180	1026	946	714	820	880	946	1026	320	823	823	883
JTF36	1285	1131	1051	714	920	985	1051	1131	320	923	923	988
JTF40	1406	1252	1172	720	1016	1106	1172	1252	360	1019	1019	1109
JTF44	1480	1350	1270		1092	1210	1290	1340	360	1095	1095	1213
JTF48	1500	1450	1370		1210	1310	1370	1400	420	1213	1213	1313
JTF56	1615	1565	1485		1404	1425	1485	1575	590	1407	1407	1428

